



UT20

Recirculating Pot Washer



The UT20 machine is specially designed to accommodate pots, pans, baking trays, mixing bowls, bun pans, tote boxes, standard Australian baking trays, garbage bins, and kitchen utensils. Top and bottom revolving wash and rinse arms provide a powerful and thorough wash action, and the new water jet designs with knife-like action, blast and strip heavy baked on dirt from all soiled surfaces. No damage to utensils thanks to wash jet balancing, reducing the need for hold-down devices. The front operation design provides easy access to the inside of the machine and for loading and unloading. The UT20 conforms to the highest of health and sanitary standards, meeting FSANZ safe food codes and certifications in HACCP and WaterMark.

UT20 standard features and benefits

- Chamber opening up to 650mm clear
- Durable stainless steel wash and rinse arms
- Independent wash and rinse systems with high volume pumps for powerful wash action
- Accepts baking trays and 75 Litre garbage bins
- Accurate digital temperature displays
- 2, 4 & 6 minutes wash cycle times
- Machine starts upon a push of a button
- Wash & rinse pump fitted a standard
- Operation interlocked to rinse temperature
- Pass-Through model available



2 mins



4 mins



6 mins



Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.



1800 013 123 | +61 2 9604 7333
sales@middleby.com.au
middleby.com.au

VIC - TAS - 47 Stubbs Street, Kensington VIC 3031
QLD - U12, 210 Queensport Rd Nth, Murarrie QLD 4172
WA - U2, 9 Meares Way, Canning Vale WA 6155

HEAD OFFICE
AND MANUFACTURING PLANT
211-217 Woodpark Road, Smithfield NSW 2164


v1_2024



UT20 Recirculating Pot Washer



Drain connection 2" BSP Gravity
Hot Water Connection 1/2" BSP
Electrical connection 3 phase 415V + N

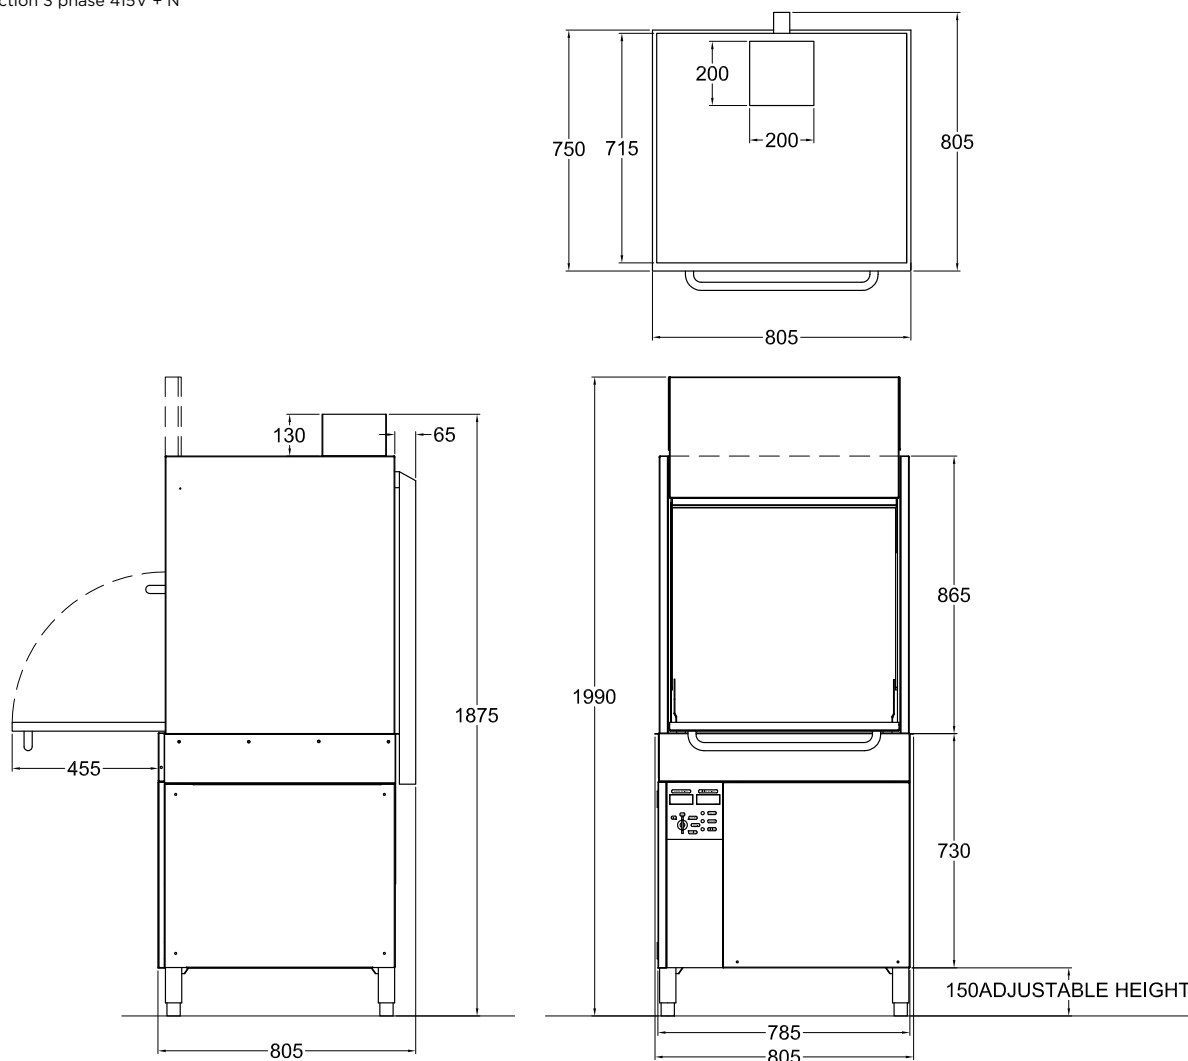

UT20 SPECIFICATIONS

DIMENSIONS (WxDxH)	805 x 805 x 1875 mm
HEIGHT WITH DOOR OPEN	1990 mm
WASH CHAMBER (WxDxH)	665 x 630 x 650 mm
RACK SIZE & OPENING (WxDxH)	660 x 610 x 650 mm
ELECTRICAL CONNECTION	3 Phase - 415V + V
RATING	13.5 kW
WATER CONNECTION	60°C / 2-4 bar (28-56 psi)

DRAIN CONNECTION	2" BSP Gravity
WASH CYCLE	2, 4 and 6 mins
WASH AND RINSE PUMP	Fitted
WATER CONSUMPTION	5L Cycle
TANK CAPACITY	70L
WEIGHT	160 kg
PACKED	1.2m ³



WaterMark
WM-022833



PE-388-GE-09

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.



1800 013 123 | +61 2 9604 7333
sales@middleby.com.au
middleby.com.au

VIC - TAS - 47 Stubbs Street, Kensington VIC 3031
QLD - U12, 210 Queensport Rd Nth, Murarrie QLD 4172
WA - U2, 9 Meares Way, Canning Vale WA 6155

**HEAD OFFICE
AND MANUFACTURING PLANT**
211-217 Woodpark Road, Smithfield NSW 2164

v1_2024